

已确认此版本的所有图纸

签名：○

日期：




REV

DESCRIPTION


DATE _____

A

B

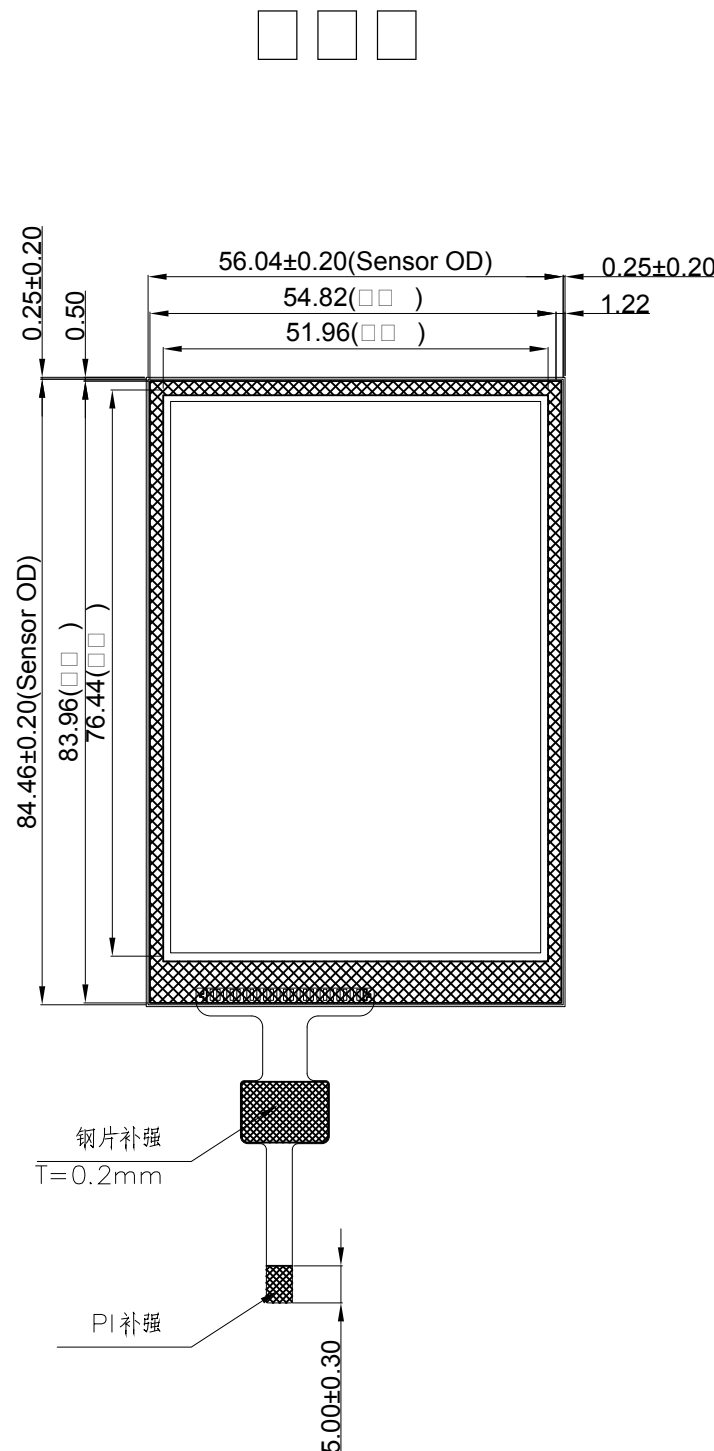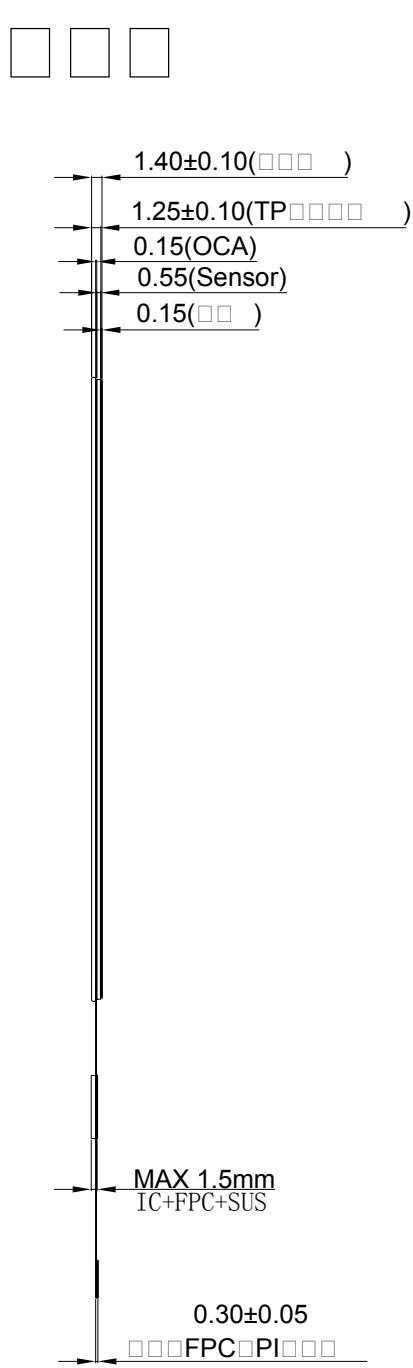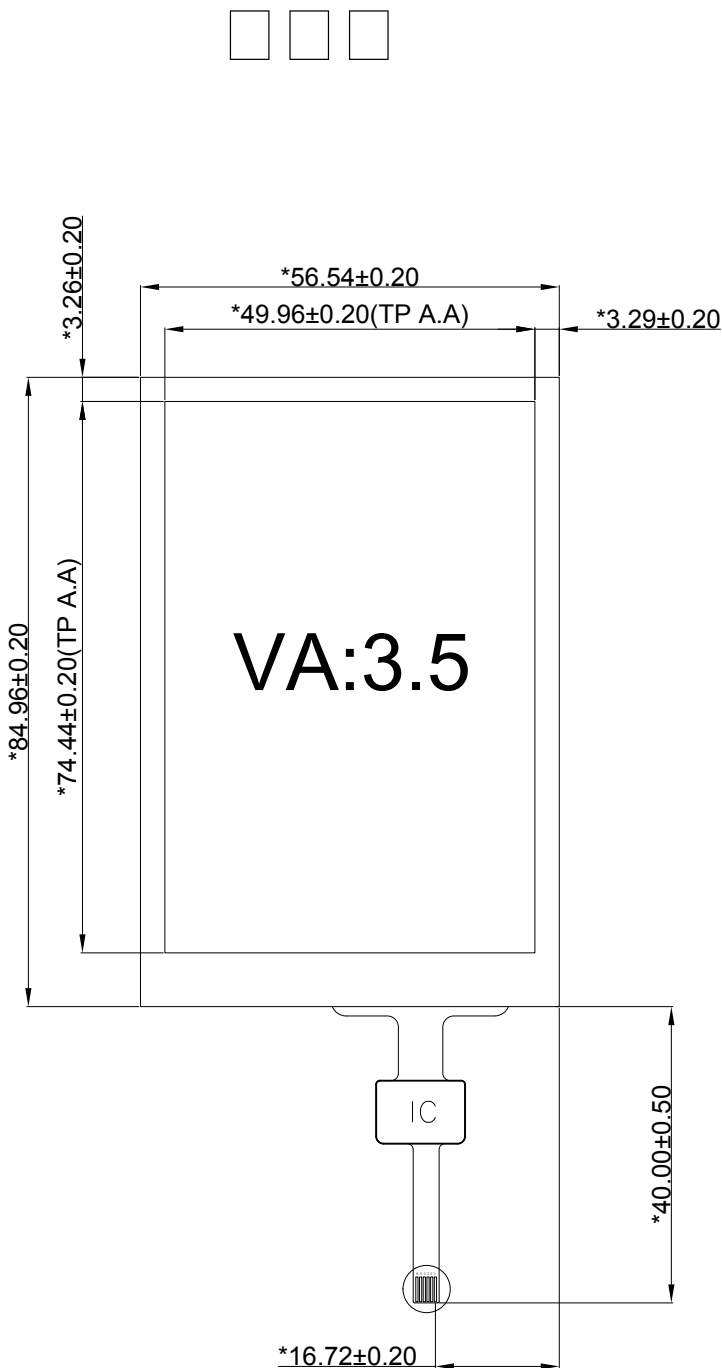

PIN	NAME
1	TP-GND
2	TP-SDA
3	TP-SCL
4	TP-RST
5	TP-INT
6	TP-VDD



COVER GLASS(0.55)
TOP OCA(0.15)
TOP ITO Glass(0.55)

Property	Requirement
IC	FT6336G
Glass Thickness	0.55mm(□□)
ITO Sensor Thickness	0.55mm
Surface Hardness	6H(750g)
Light Transmission	≥82%
Operating Temperature	-20~60□
Storage Temperature	-30~70□
Operating Humidity	45~85 RH
Storage Humidity	45~95 RH

□□□□			
□□□□	□□ +□□	LCM□□□	320(RGB)*480
□□□□	□□	LCM□□	TN
VDD□□□□	2.8V	CTP□ LCM□□	/mm
I²C□□□□	2.8V	I²C□□□□	IIC
Sensor ID		□□□□□□	INT
□□□□		□	□
ESD□□	10KV 6KV	□□□□	□□□
□□ I²C□□□□□□□□	□	□□ INT□□□□□□□□	□

深圳市阿美林电子科技有限公司
Shenzhen Amelin Electronic Technology Co., Ltd


TITLE.

AML-TP35140-002-A

REV.

UNIT

SIZE



DRG DATE

2017-03-23

DRAWING

Wang Jin

CHECK

APPROVE